

EnviraSlim Fixed Lite Windows




Thermally broken aluminium



A STYLISH, HIGH-PERFORMING CHOICE.

Enhance your home with endless design and configuration opportunities with the EnviraSlim fixed lite window. The perfect partner to other windows in the EnviraSlim range, the fixed lite provides abundant light and maximum views with its slim frame, while not compromising on performance and reaching up to 3 square metres of glass for each window lite.

- Square slimline frame creates a minimalist style with larger glass viewing area for maximum natural light and views.
- Available in a variety of configurations and coupling options.
- Compatible with other EnviraSlim residential windows, providing design flexibility.
- Double-glazing with thermally broken technology prevents heat transfer between inside and outside, reduces energy bills and offers year-round comfort.
- Externally glazed to make it easier to glaze larger panels on-site and reduce manual handling.
- Up to 3sqm of glass in a single lite.
- A range of glazing options to improve comfort, serenity, security and privacy.

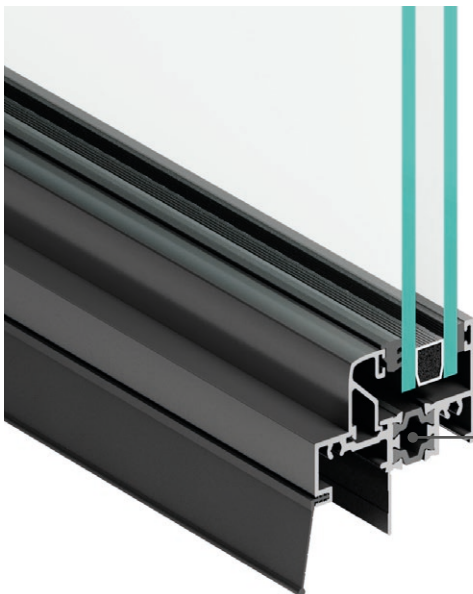

Thermally Broken Frames

Prevent heat transfer, improve energy efficiency, and offer low maintenance and durability.

EnviraSlim Fixed Lite Windows



Thermally broken aluminium

SPECIFICATIONS

Product	Fixed Lite Window
Product series	EnviraSlim
Frame profile	57mm x 35mm
Sill options	N/A
Max frame	Single lite 3 sq m
Max sash	N/A
Sash profile	N/A
Glazing	20mm Double glazing only
BAL rating	BAL40
Seal type	N/A
Colour options	Black Matt, Monument Matt, Surfmist Satin, White Gloss
Screen options	N/A
Hardware	N/A
Installation options	By builder or Stegbar installation service
Warranty	10-year warranty

For full range of configurations and standard sizes refer to the standard size and range charts.



Seamless coupling

Compatible with other windows for design flexibility.

PERFORMANCE

Acoustic Performance	
Performance Criteria	Glass Type
RW32	Double glazing – 4/12Ar/4
RW34	Double glazing – 6/8Ar/6
RW36	Double glazing – 4/10Ar/6.38 Lam
RW36	Double glazing – 6/6Ar/10.38 Lam
RW38	Double glazing – 4/10Ar/6.5 Vlam Hush
Wind & Water Performance	
Performance Criteria	Rating
SLS	1200Pa
ULS	3000Pa
Water	450Pa
N Rating	N4 Corner/N5
Thermal Performance	
Performance Criteria	Rating
Double glazed Uw range	1.4 – 2.7
Double glazed SHGC range	0.22 – 0.69

Whilst the utmost care is taken to ensure the accuracy of the information contained herein, it is provided in the understanding that the company shall under no circumstances be liable for any injuries, expenses or other losses which may in any way be attributable to the use or adoption of such data and/or design details. Stegbar reserves the right to alter or amend without prior notice data and design details specified herein. stegbar.com.au JWSNAT0598/0723